

MER

ISUZU

MG-6.5

1800 RPM

-FACTORY DIRECT- MARINE DIESEL GENERATOR

3CA/281SL

We don't make a lot of noise, just a lot of electricity!


(76 DbA @ one meter without a sound enclosure)



*Tough enough to start a 6 hp electric motor.

*Precise enough to run your computer.

**You tell us the application,
We'll build the generator for the job.*

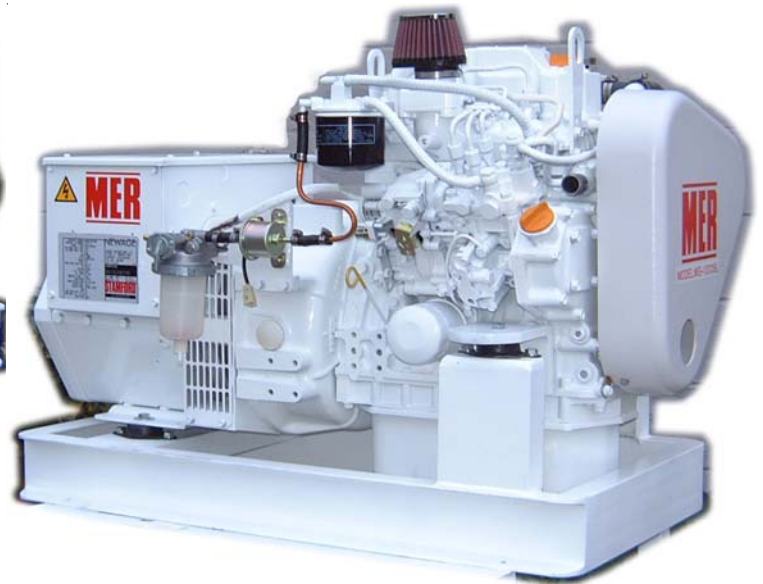

Standard MER Features :

* Deluxe MER instrument panel, with 4 Murphy Switch-gauges, pre-wired for easy plug-together installation.

*12 Volt, 1.0kw Electric starter, 15 Amp Alternator and remote electric start / stop solenoid.

*New generation thermostatically controlled fuel injection pump, automatic air bleeding, achieve the lowest possible smoke and exhaust emissions. The C series engines meet all Tier II emission standards.

*Balanced, four stroke, OHV, in-direct injected design make the Isuzu C series one of the most fuel efficient engines in its class.

*Independent, automatic safety shutdown systems for high water temperature or low oil pressure protect your investment.

*Structural steel base frame with captive anti-vibration suspension mounts, (97% efficiency) minimize vibration and noise transfer to the frame.

**Dimensions will change with optional generators and or cooling systems.
Please confirm exact configuration if dimensions are critical.**

© 2005 MER Equipment
All rights reserved.

All dimensions in inches
Std. Keel cooled config.

Lengths**

17.5" 3CB Engine only

15.94" (Lima SER 281 frame)

14.3" (Lima Mac 250 frame)

11.6" (pancake Jr.)

10.25" (capacitor reg. 1ph only)

14.41" (Newage BCI-164A)

*459 lbs with Lima SER 281 frame
*408 lbs with Lima Mac-R 250 frame
*398 lbs with Fidelity Pancake Jr.
*358 lbs with Fidelity capacitor regulated
(Single Phase only)
*446 lbs with Series 5 BCI-164AC

**MG-6.5CASN
6.5 KW-1800 RPM
499 POUNDS***

Length: 29.1 - 33.5" **

Width: 18.0"

Height: 23.2" (Min 20.2")

(Dependent on Gen. and frame option)

MER Equipment

338 West Nickerson
Seattle, Washington 98119 - USA
(206) 286-1817 FAX: (206) 286-1917

Toll Free: 1-800-777-0714
email: info@merequipment.com
WWW.MEREQUIPMENT.COM

MER-ISUZU MG-6.5CASN 1800 RPM MARINE GENERATOR

OUTPUT @ 1800 RPM - 60Hz:

Continuous 3 Phase rating @ .8 PF.....6.5 Kw
Intermittent rating (standby).....7.2 Kw
Voltage regulation: MG-6.5CASN (SER).....±1%
MG-6.5CAMN (MAC).....±4%

Note: SER Basler regulated units are built for multipurpose onboard power. Optional motor application units are built for large motor starting, (up to 1 hp per 1 Kw starting capacity).

INSTALLATION SPECIFICATIONS:

Fresh Water inlet size: 30mm/1-1/8" OD (Hose ID 1-1/8")
Exhaust output size: 38mm/1.5" ID w/4" flange
Opt. wet exhaust elbow: 51mm/2" OD (Hose ID 2")
Fuel inlet size: 8mm/ 5/16" OD (Hose ID 5/16")
Fuel return size: 8mm/ 5/16" OD (Hose ID 5/16")
Heat Rejection @ 1800rpm: 535 BTU/minute
Engine sound pressure: 76 dbA at one meter
Exhaust Gas Flow: 64 CFM
Intake Air flow for combustion: 25CFM

MER marine gensets come standard set up for keel cooling. Heat exchanger cooling is available with brass direct-driven sea water pump, and cupro-nickle heat exchanger.

ENGINE SPECIFICATIONS:

ENGINE MODEL: ISUZU 3CA1GZG-01, SAE 5/7.5
ENGINE TYPE.....3 CYLINDER, 4 CYCLE, OVERHEAD
VALVE, WATER COOLED, MARINE DIESEL by MER
BORE X STROKE..... (70mm x 74mm)
PISTON DISPLACEMENT.....55cu.in. (.9L)
RATED HORSEPOWER PRIME.....10.4HP @ 1800
RATED HORSEPOWER STANDBY.....11.5HP @ 1800
COMPRESSION RATIO.....23.5:1
OIL PAN ALLOWABLE ANGLE.....30 DEG. ALL DIRTN.
OIL CAPACITY.....6.7quarts (5.0L)
ENGINE ROTATION.....CCW (facing flywheel)
ALTERNATOR.....15 Amps, 12V
FRONT PTO PULLY SIDE-LOAD CAPACITY.....5.8 Hp

- * low vibration & noise due to high mass flywheel, crank-center mounted vibration isolators, and denoised engine.
- * fuel efficient, low smoke performance, thanks to four cycle OHV thermostatically controlled in-direct injection system.
- * wet exhaust manifold and expansion tank provide low engine room temperatures and reduced fire hazard.
- * easy starting in all weather conditions, with glow plug pre-heating module.
- * automatic safety shutdown system triggered by low oil pressure or high water temperature conditions, for engine protection and safety.

OPTIONS:

MOTOR START GENERATORS, HEAT EXCHANGER COOLING, FRONT END POWER TAKEOFFS, AC INSTRUMENTS, EXHAUST SILENCERS (WET OR DRY), RACOR FUEL FILTRATION, LOW FLUID LEVEL SHUTDOWNS, OIL CHANGE PUMP, SOUND INSULATED ENCLOSURES, AUTO-START ELECTRONIC ENGINE CONTROLS, AND MANY MORE, TOO LENGTHY TO LIST.

MER Marine Generators

*"Superior Service --
--Better Engineering."*

The MER Marine Generator combines a direct driven, 1800 RPM, brushless, continuous duty alternator and MER marinized Isuzu Diesel engine in a generator system manufactured & load tested to the strictest quality standards.

The MER Generator is designed and built specifically for the rugged conditions of commercial use. The expected time between overhauls on the MER packaged generator set is 20 to 50 thousand hours.

Around the world, the Isuzu name has become synonymous with dependable, fuel efficient, maintenance free diesel power. MER has been building generator sets for the fishermen, contractors, and processors of the west coast since 1964. Our generators are built to withstand the tests of time and heavy use.

Talk to an owner of our products. Ask him about our gensets and our after sales services and then call us. We are toll free from anywhere in North America and we're on call 24 hours a day for same day shipping, worldwide.

Warranty on major components is 5 years.



www.merequipment.com

A DIVISION OF MARINE ENGINE & REPAIR

**338 West Nickerson
SEATTLE, WASHINGTON 98119
PHONE (206) 286-1817
TOLL FREE 1-800-777-0714
FAX (206) 286-1917**

