




EM PRODUCTS™
PHILLIPS & TEMRO INDUSTRIES

Low Pressure Drop Silencers

Model TAU Series

Residential Grade/Low Pressure Drop Design

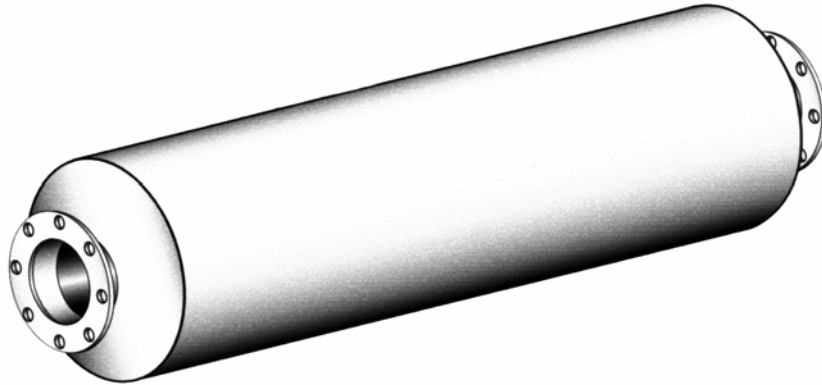

Standard Silencer Application

- Heavy-duty residential grade series silencer
- Recommended for use on turbo charged engines
- Effective noise reduction in residential areas

Standard Construction Features


- High temperature (1200° F.) satin black finish
- Can be mounted vertically or horizontally
- Straight-through absorption type

Optional Construction Features and Accessories

- Stainless steel and aluminum construction
- Drains available
- Complete line of engine exhaust accessories

Engine Exhaust Silencer & Accessories:

- | | |
|-------------------|--------------------|
| 1. Silencer | 5. Mitered Exhaust |
| 2. Flex Connector | 6. Elbows |
| 3. Mounting Band | 7. Flange / Gasket |
| 4. Rain Cap | |

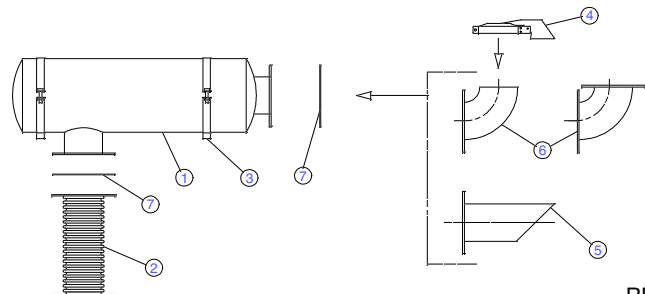


REV. 01/99
99EC-3000



Low Pressure Drop—"TAU" Series


Residential Grade

End Inlet / End Outlet

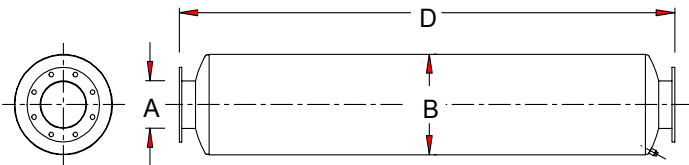


Part Number	A	B	D	WT
TAUE-02-980995	2	6	23	10
TAUE-25-980996	2.5	6	27	10
TAUE-03-980997	3	8	30	19
TAUE-35-980998	3.5	8	31	22
TAUE-04-980999	4	8	36	22
TAUE-05-980400	5	10	51	71
TAUE-06-980401	6	10	60	75
TAUE-08-980265	8	14	66	140
TAUE-10-980403	10	16	70	180
TAUE-12-980404	12	18	70	225
TAUE-14-980405	14	20	88	340
TAUE-16-980406	16	24	108	480
TAUE-18-980407	18	26	108	540
TAUE-20-980408	20	28	132	840
TAUE-22-980409	22	36	136	1140
TAUE-24-980410	24	36	196	1600

Side Inlet / End Outlet

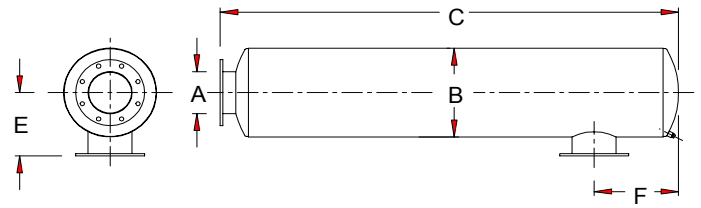

Part Number	A	B	C	E	F	WT
TAUS-05-980415	5	10	48	9	4	71
TAUS-06-980416	6	10	57	9	7	75
TAUS-08-980009	8	14	63	11	8	140
TAUS-10-980007	10	16	67	12	10	180
TAUS-12-980188	12	18	67	13	11	225
TAUS-14-980420	14	20	85	14	12	340
TAUS-16-980016	16	24	105	16	14	480
TAUS-18-980422	18	26	105	17	15	540
TAUS-20-981473	20	28	129	18	17	840
TAUS-22-981474	22	36	133	22	19	1140
TAUS-24-981475	24	36	193	22	20	1600

Note: 3 1/2 inch and smaller standard with male NPT connections; 4 inch and larger standard with 150 # ANSI drilled plate flange connections. Dimensions in inches, weights in pounds. Dimensions and weights are nominal and may vary slightly with production models

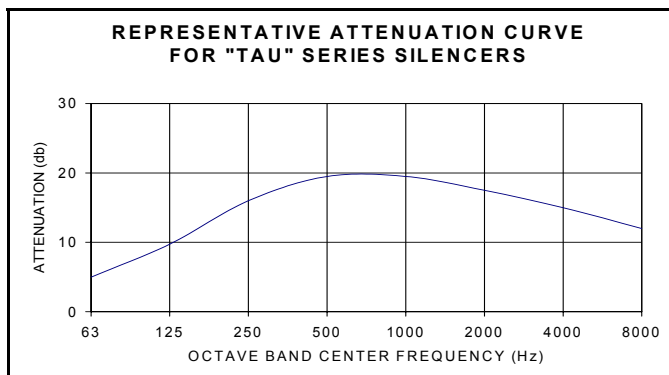

- Typical Reduction = 12—15 dBA
- Carbon Steel Construction
- Stainless Steel Construction Available
- Contact Factory for Custom Fit Applications

3200-010